



# RSMA Series

## Features

- Surface Mount Devices
- Lead free device
- Size 4532 mm/1812 mils
- Surface Mount packaging for automated assembly

## Applications

- Almost anywhere there is a low voltage power supply, up to 60V and a load to be protected, including:
- Computer mother board, Modem, USB hub
  - PDAs & Charger, Analog & digital line card
  - Digital cameras, Disk drivers, CD-ROMs,

**RS INDUSTRY LIMITED**

## Performance Specification



Model	V <sub>max</sub> (Vdc)	I <sub>max</sub> (A)	I <sub>hold</sub> @25°C (A)	I <sub>trip</sub> @25°C (A)	P <sub>d</sub> Typ. (W)	Maximum Time To Trip		Resistance	
						Current (A)	Time (Sec)	R <sub>i</sub> min (Ω)	R <sub>1</sub> max (Ω)
RSMA010	30.0	100	0.10	0.30	0.8	0.5	1.50	0.750	15.000
RSMA014	60.0	100	0.14	0.34	0.8	1.5	0.15	0.650	6.000
RSMA020	30.0	100	0.20	0.40	0.8	8.0	0.02	0.350	5.000
RSMA030	30.0	100	0.30	0.60	0.8	8.0	0.10	0.250	3.000
RSMA050*	15.0	100	0.50	1.00	0.8	8.0	0.15	0.150	1.000
RSMA075*	13.2	40	0.75	1.50	0.8	8.0	0.20	0.090	0.450
RSMA075-16V	16.0	100	0.75	1.50	0.8	8.0	0.20	0.090	0.450
RSMA110*	8.0	100	1.10	2.20	0.8	8.0	0.30	0.050	0.250
RSMA110-16V	16.0	100	1.10	2.20	0.8	8.0	0.30	0.050	0.250
RSMA125	16.0	100	1.25	2.50	0.8	8.0	0.40	0.050	0.140
RSMA150*	8.0	100	1.50	3.00	0.8	8.0	0.50	0.040	0.160
RSMA150-12V	12.0	100	1.50	3.00	0.8	8.0	0.50	0.040	0.160
RSMA150-16V	16.0	100	1.50	3.00	0.8	8.0	0.50	0.040	0.160
RSMA160*	8.0	100	1.60	2.80	0.8	8.0	1.00	0.030	0.130
RSMA200*	8.0	100	2.00	4.00	0.8	8.0	2.00	0.020	0.100
RSMA260	8.0	100	2.60	5.00	0.8	8.0	2.50	0.015	0.050
RSMA300	8.0	100	3.00	5.00	0.8	8.0	4.00	0.012	0.040

**I<sub>hold</sub>** = Hold Current. Maximum current device will not trip in 25°C still air.

**I<sub>trip</sub>** = Trip Current. Minimum current at which the device will always trip in 25°C still air.

**V<sub>max</sub>** = Maximum operating voltage device can withstand without damage at rated current (I<sub>max</sub>).

**I<sub>max</sub>** = Maximum fault current device can withstand without damage at rated voltage (V<sub>max</sub>).

**P<sub>d</sub>** = Power dissipation when device is in the tripped state in 25°C still air environment at rated voltage.

**R<sub>i</sub>min/max** = Minimum/Maximum device resistance prior to tripping at 25°C.

**R<sub>1</sub>max** = Maximum device resistance is measured one hour post reflow.

**CAUTION** : Operation beyond the specified ratings may result in damage and possible arcing and flame.

## Environmental Specifications

Test	Conditions	Resistance change
Passive aging	+85°C, 1000 hrs.	±5% typical
Humidity aging	+85°C, 85% R.H. , 168 hours	±5% typical
Thermal shock	+85°C to -40°C, 20 times	±33% typical
Resistance to solvent	MIL-STD-202,Method 215	No change
Vibration	MIL-STD-202,Method 201	No change
Ambient operating conditions : - 40 °C to +85 °C		
Maximum surface temperature of the device in the tripped state is 125 °C		

**AGENCY APPROVALS :**



\*: UL approved

The others: UL pending

**AGENCY FILE NUMBERS :** UL FILE NO. : E201504/E319079

## I<sub>hold</sub> Versus Temperature

Model	Maximum ambient operating temperature (T <sub>mao</sub> ) vs. hold current (I <sub>hold</sub> )								
	-40°C	-20°C	0°C	25°C	40°C	50°C	60°C	70°C	85°C
RSMA010	0.16	0.14	0.12	0.11	0.08	0.07	0.06	0.05	0.03
RSMA014	0.23	0.19	0.17	0.14	0.12	0.10	0.09	0.08	0.06
RSMA020	0.29	0.26	0.23	0.20	0.17	0.15	0.14	0.12	0.10
RSMA030	0.44	0.39	0.35	0.30	0.26	0.23	0.21	0.18	0.15
RSMA050	0.59	0.57	0.55	0.50	0.45	0.43	0.35	0.30	0.23
RSMA075	1.10	0.99	0.87	0.75	0.63	0.57	0.49	0.45	0.35
RSMA075-16V	1.09	0.98	0.86	0.75	0.62	0.56	0.48	0.44	0.34
RSMA110	1.60	1.45	1.28	1.10	0.92	0.83	0.71	0.66	0.52
RSMA110-16V	1.59	1.44	1.27	1.10	0.92	0.82	0.70	0.64	0.50
RSMA125	2.00	1.75	1.52	1.25	1.00	0.95	0.90	0.75	0.53
RSMA150	2.30	2.05	1.77	1.50	1.23	1.09	0.95	0.82	0.61
RSMA150-12V	2.29	2.04	1.76	1.50	1.22	1.08	0.94	0.80	0.59
RSMA150-16V	2.28	2.03	1.75	1.50	1.21	1.07	0.93	0.79	0.58
RSMA160	2.10	1.96	1.88	1.60	1.26	1.12	0.98	0.84	0.63
RSMA200	2.88	2.61	2.25	2.00	1.80	1.66	1.45	1.09	0.80
RSMA260	3.90	3.42	2.96	2.60	2.33	2.07	1.94	1.35	1.00
RSMA300	4.15	3.76	3.46	3.00	2.55	2.28	2.01	1.61	1.33


# RSMA Series

RS INDUSTRY LIMITED


## Construction And Dimension (Unit:mm)

Model	A		B		C		D	E
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Min.
RSMA010	4.37	4.73	3.07	3.41	0.50	1.00	0.30	0.25
RSMA014	4.37	4.73	3.07	3.41	0.50	1.00	0.30	0.25
RSMA020	4.37	4.73	3.07	3.41	0.50	1.00	0.30	0.25
RSMA030	4.37	4.73	3.07	3.41	0.50	1.00	0.30	0.25
RSMA050	4.37	4.73	3.07	3.41	0.40	0.90	0.30	0.25
RSMA075	4.37	4.73	3.07	3.41	0.40	0.90	0.30	0.25
RSMA075-16V	4.37	4.73	3.07	3.41	0.40	0.90	0.30	0.25
RSMA110	4.37	4.73	3.07	3.41	0.40	0.90	0.30	0.25
RSMA110-16V	4.37	4.73	3.07	3.41	0.40	0.90	0.30	0.25
RSMA125	4.37	4.73	3.07	3.41	0.30	0.80	0.30	0.25
RSMA150	4.37	4.73	3.07	3.41	0.30	0.80	0.30	0.25
RSMA150-12V	4.37	4.73	3.07	3.41	0.30	0.80	0.30	0.25
RSMA150-16V	4.37	4.73	3.07	3.41	0.30	0.80	0.30	0.25
RSMA160	4.37	4.73	3.07	3.41	0.30	0.80	0.30	0.25
RSMA200	4.37	4.73	3.07	3.41	0.40	0.80	0.30	0.25
RSMA260	4.37	4.73	3.07	3.41	0.50	1.10	0.30	0.25
RSMA300	4.37	4.73	3.07	3.41	0.50	1.20	0.30	0.25

## Dimensions & Marking

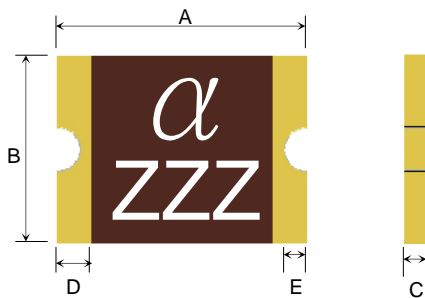

## Recommended Pad Layout (mm)

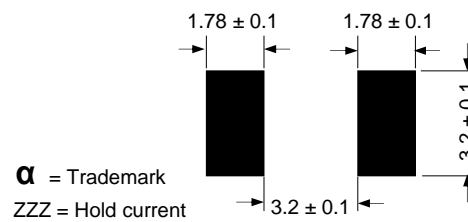

## Termination Pad Characteristics


Terminal pad materials : Gold-Plated Nickel-Copper

Terminal pad solderability : Meets EIA specification RS186-9E and ANSI/J-STD-002 Category 3.


## Rework

Use standard industry practices, the removal device must be replaced with a fresh one.

## Thermal Derating Curve

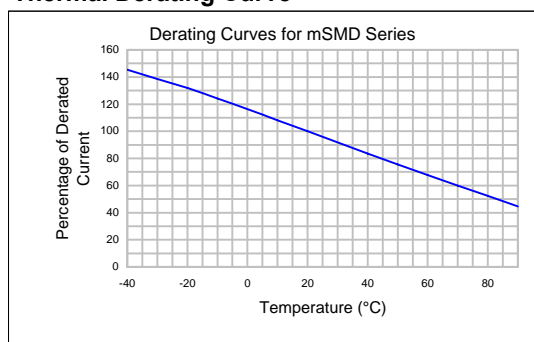

## Typical Time-To-Trip At 25°C

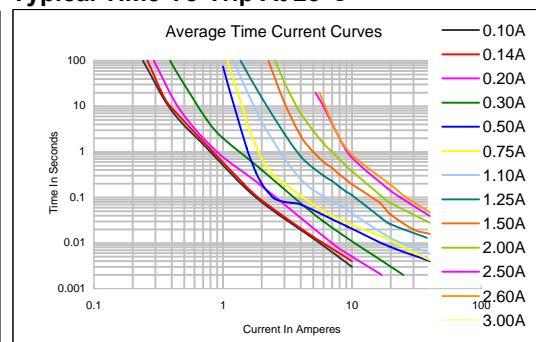


## WARNING:

- Use PPTC beyond the maximum ratings or improper use may result in device damage and possible electrical arcing and flame.
- PPTC are intended for protection against occasional over current or over temperature fault conditions and should not be used when repeated fault conditions or prolonged trip events are anticipated
- Device performance can be impacted negatively if devices are handled in a manner inconsistent with recommended electronic, thermal, and mechanical procedures for electronic components.
- Use PPTC with a large inductance in circuit will generate a circuit voltage ( $L di/dt$ ) above the rated voltage of the PPTC.
- Avoid impact PPTC device its thermal expansion like placed under pressure or installed in limited space.
- Contamination of the PPTC material with certain silicon based oils or some aggressive solvents can adversely impact the performance of the devices. PPTC SMD can be cleaned by standard methods.
- Requests that customers comply with our recommended solder pad layouts and recommended reflow profile. Improper board layouts or reflow profile could negatively impact solderability performance of our devices.

# RSMA Series

RS INDUSTRY LIMITED

## Recommended Solder Reflow Conditions

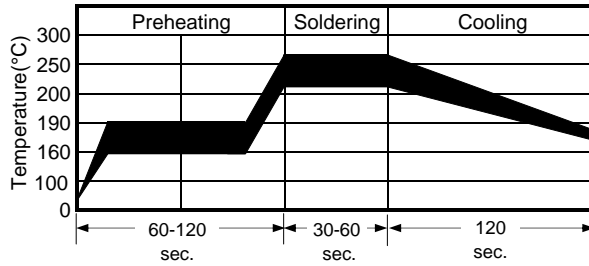


- Recommended reflow methods : IR, vapor phase oven, hot air oven.
  - Devices are not designed to be wave soldered to the bottom side of the board.
  - Recommended maximum paste thickness is 0.25 mm (0.010 inch).
  - Devices can be cleaned using standard method and solvents.
- Note : If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.


## Tape And Reel Specifications (mm)

Governing Specifications	EIA 481-1
W	12 ± 0.3
P <sub>0</sub>	4.0 ± 0.10
P <sub>1</sub>	8.0 ± 0.10
P <sub>2</sub>	2.0 ± 0.05
A <sub>0</sub>	3.5 ± 0.23
B <sub>0</sub>	5.1 ± 0.15
B <sub>1</sub> max.	5.9
D <sub>0</sub>	1.5 + 0.1, -0
F	5.5 ± 0.05
E <sub>1</sub>	1.75 ± 0.10
E <sub>2</sub> min.	10.25
Tmax.	0.6
T <sub>1</sub> max.	0.1
K <sub>0</sub>	0.9 ± 0.15
Leader min.	390
Trailer min.	160
Reel Dimensions	
A max.	178
N min.	60
W <sub>1</sub>	12.4 + 2.0, -0.0
W <sub>2</sub> max.	18.4

## EIA Tape Component Dimensions

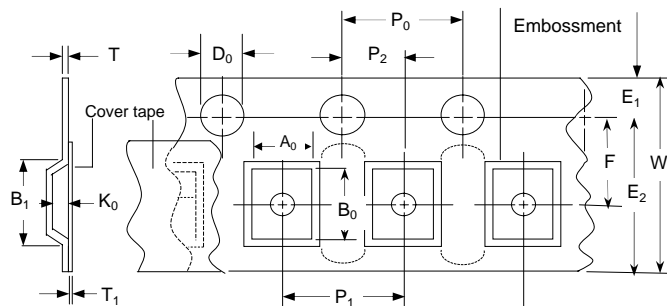

## EIA Reel Dimensions

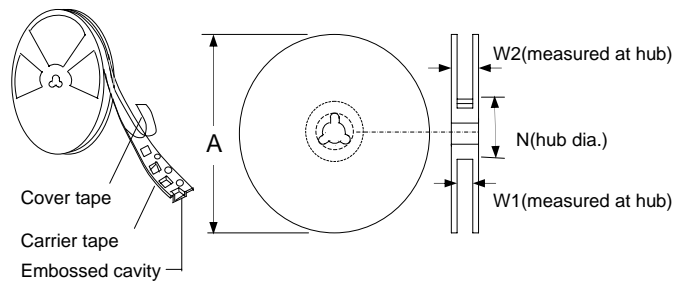

## Storage And Handling

- Storage conditions : 40°C max, 70% R.H.
- Devices may not meet specified performance if storage conditions are exceeded.

## Order Information

RSMA	110	Packaging
Product name	Hold	Tape & Reel Quantity
Size 4532 mm / 1812 mils	Current	010,014,020,030,260,300 1,500 pcs/reel
SMD : surface mount device	1.10A	050,075,110,150,160,200 2,000 pcs/reel

Tape & reel packaging per EIA481-1